



SANIACCESS® 2

Designed to provide easy access for toilet with vanity applications.
Convenient access panels allow you to service and maintain the macerator without having to remove it.



WHY CHOOSE THIS PRODUCT?

Easy service access

Suitable for one toilet and hand basin

Easy maintenance without removal of unit


Macerator needs minimum 4.5 L of unrestricted flush for optimal function

Quiet technology

Ideal for adding an additional toilet or powder room anywhere


VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m.
All horizontal pipework requires a minimum of 1:100 fall.

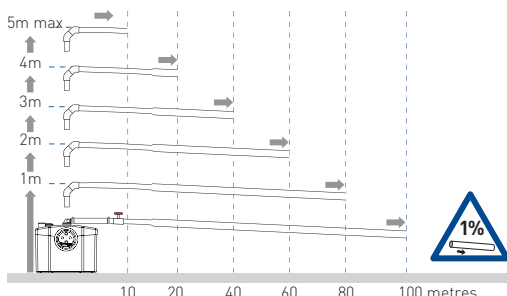


TECHNICAL CHARACTERISTICS

Discharge Pipework	20 mm
Motor Power	400 Watts
Voltages	220-240 V/50 Hz
Working Waste Water Temp	35°C
Product Weight	5.8 kg
Overall Measurements	424 x 330 x 166 mm
Inlet Pipework	40 mm
IP Rating	IP44

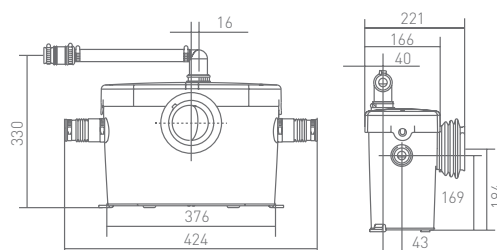

FLOW RATE PERFORMANCE CHART

Discharge height (m)

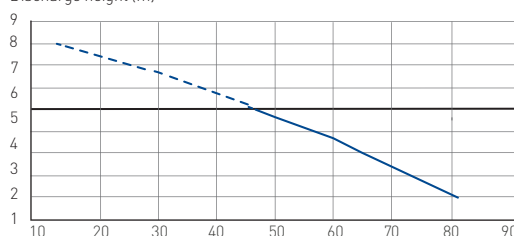

APPLICATIONS



TOILET



HAND BASIN



ATS 5200.101
Certificate No. 23048
Manufacturer: SFA
Brand: Saniflo

Product Reference:
SA80



Double access:

A Direct access to the blade if maintenance is required

B Direct access to electric components

Made in France to the highest standards, needs to be installed by a licensed plumber